

SABS IDLERS CATALOGUE



INDEX

3 ROLL TROUGHING IN-LINE IDLER

SABS SERIES 25.....	3
SABS SERIES 30.....	4
SABS SERIES 35.....	5
SABS SERIES 40	6

3 ROLL BELT FRIENDLY IDLER

SABS SERIES 25.....	7
SABS SERIES 30.....	8
SABS SERIES 35.....	9
SABS SERIES 40	10

3 ROLL TROUGHING OFFSET IDLER

SABS SERIES 25.....	11
SABS SERIES 30.....	12
SABS SERIES 35.....	14
SABS SERIES 40	16

3 ROLL IMPACT OFFSET IDLER

SABS SERIES 25.....	17
SABS SERIES 30.....	20
SABS SERIES 40	22

5 ROLL IMPACT IDLER

SABS SERIES 25.....	23
SABS SERIES 30.....	25

5 ROLL BELT FRIENDLY IDLER

SABS SERIES 25.....	26
SABS SERIES 30.....	27


2 ROLL VEE RETURN IDLER

SABS SERIES 25.....	28
SABS SERIES 30.....	29

1 ROLL FLAT RETURN IDLER

SABS SERIES 25.....	30
SABS SERIES 30.....	31

3 ROLL TROUGHING IN-LINE IDLER **SABS SERIES 25**

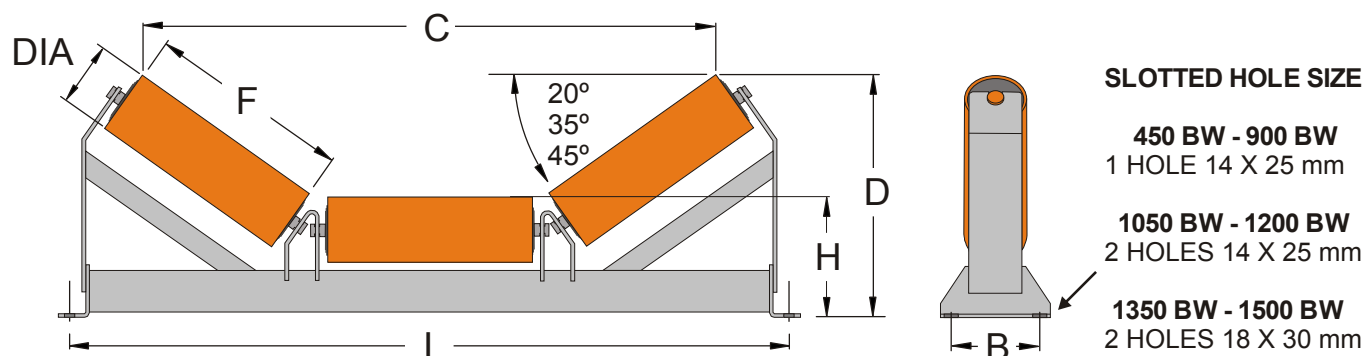


SABS SERIES S 25			127 DIAMETER								BEARING 620 5-2RS		
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25B- 450 -127- 62-00	450	190	686	527	268	481	312	439	337	203	0	10.2	19
SABS25B- 500 -127- 62-00	500	200	736	556	271	508	318	463	344	203	0	10.5	20
SABS25B- 600 -127- 62-00	600	240	838	671	285	613	341	560	373	203	0	11.9	23
SABS25B- 750 -127- 62-00	750	290	990	815	302	745	369	680	408	203	0	13.6	27
SABS25B- 900 -127- 62-00	900	340	1144	959	319	877	398	801	443	203	0	15.4	34
SABS25B- 1050 -127- 62-00	1050	390	1296	1103	336	1009	427	922	479	203	100	17.1	37
SABS25B- 1200 -127- 62-00	1200	450	1448	1276	357	1167	461	1067	521	203	100	19.2	44
SABS25B- 1350 -127- 62-00	1350	500	1600	1420	374	1299	490	1187	556	203	240	20.9	48
SABS25B- 1500 -127- 62-00	1500	560	1752	1593	394	1458	524	1332	599	203	240	23.0	55

SABS SERIES S 25			152 DIAMETER								BEARING 620 5-2RS		
PART NUMBER	BW	F	L	20 °		35 °		45 °		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25B- 450 -152- 62-00	450	190	686	527	280	481	324	439	349	215	0	12.9	22
SABS25B- 500 -152- 62-00	500	200	736	556	283	508	330	463	356	215	0	13.3	23
SABS25B- 600 -152- 62-00	600	240	838	671	297	613	353	560	385	215	0	15.0	27
SABS25B- 750 -152- 62-00	750	290	990	815	314	745	381	680	420	215	0	17.2	32
SABS25B- 900 -152- 62-00	900	340	1144	959	331	877	410	801	455	215	0	19.4	38
SABS25B- 1050 -152- 62-00	1050	390	1296	1103	348	1009	439	922	491	215	100	21.6	42
SABS25B- 1200 -152- 62-00	1200	450	1448	1276	369	1167	473	1067	533	215	100	24.3	50
SABS25B- 1350 -152- 62-00	1350	500	1600	1420	386	1299	502	1187	568	215	240	26.5	54
SABS25B- 1500 -152- 62-00	1500	560	1752	1593	406	1458	536	1332	611	215	240	29.1	62

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL TROUGHING IN-LINE IDLER **SABS SERIES 30**

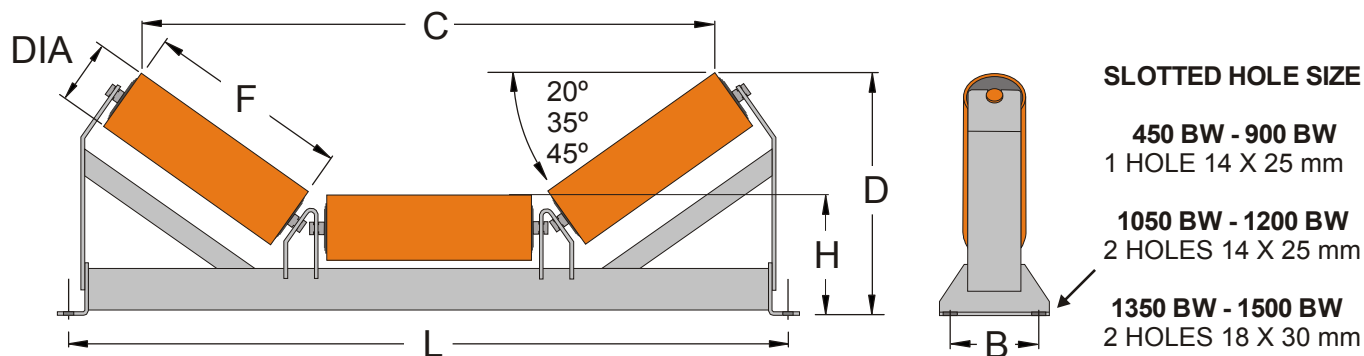


SABS SERIES S 25				127 DIAMETER						BEARING 620 5-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25B- 450 -127- 62-00	450	190	686	527	268	481	312	439	337	203	0	10.2	19
SABS25B- 500 -127- 62-00	500	200	736	556	271	508	318	463	344	203	0	10.5	20
SABS25B- 600 -127- 62-00	600	240	838	671	285	613	341	560	373	203	0	11.9	23
SABS25B- 750 -127- 62-00	750	290	990	815	302	745	369	680	408	203	0	13.6	27
SABS25B- 900 -127- 62-00	900	340	1144	959	319	877	398	801	443	203	0	15.4	34
SABS25B- 1050 -127- 62-00	1050	390	1296	1103	336	1009	427	922	479	203	100	17.1	37
SABS25B- 1200 -127- 62-00	1200	450	1448	1276	357	1167	461	1067	521	203	100	19.2	44
SABS25B- 1350 -127- 62-00	1350	500	1600	1420	374	1299	490	1187	556	203	240	20.9	48
SABS25B- 1500 -127- 62-00	1500	560	1752	1593	394	1458	524	1332	599	203	240	23.0	55

SABS SERIES S 25				152 DIAMETER						BEARING 620 5-2RS			
PART NUMBER	BW	F	L	20 °		35 °		45 °		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25B- 450 -152- 62-00	450	190	686	527	280	481	324	439	349	215	0	12.9	22
SABS25B- 500 -152- 62-00	500	200	736	556	283	508	330	463	356	215	0	13.3	23
SABS25B- 600 -152- 62-00	600	240	838	671	297	613	353	560	385	215	0	15.0	27
SABS25B- 750 -152- 62-00	750	290	990	815	314	745	381	680	420	215	0	17.2	32
SABS25B- 900 -152- 62-00	900	340	1144	959	331	877	410	801	455	215	0	19.4	38
SABS25B- 1050 -152- 62-00	1050	390	1296	1103	348	1009	439	922	491	215	100	21.6	42
SABS25B- 1200 -152- 62-00	1200	450	1448	1276	369	1167	473	1067	533	215	100	24.3	50
SABS25B- 1350 -152- 62-00	1350	500	1600	1420	386	1299	502	1187	568	215	240	26.5	54
SABS25B- 1500 -152- 62-00	1500	560	1752	1593	406	1458	536	1332	611	215	240	29.1	62

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL TROUGHING IN-LINE IDLER **SABS SERIES 35**

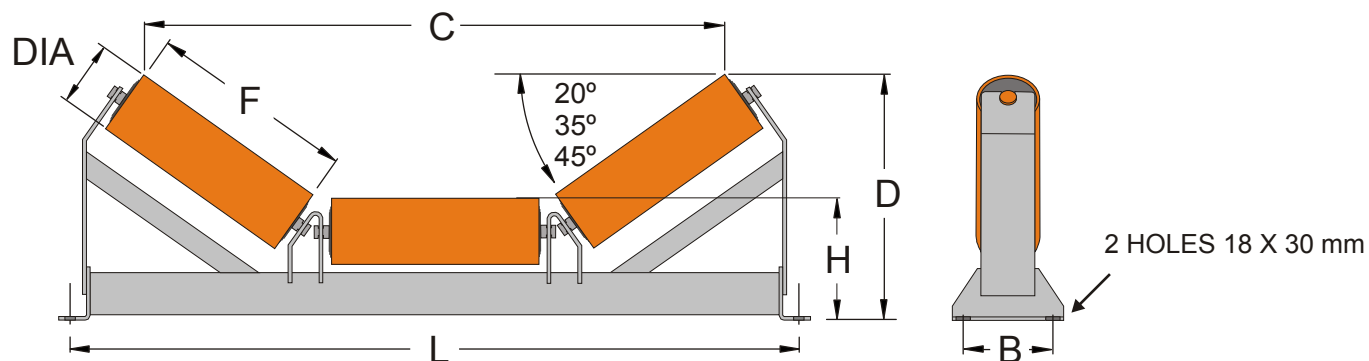


SABS SERIES S 35				152 DIAMETER						BEARING 630 7-2RS			
PART NUMBER	BW	F	L	20 °		35 °		45 °		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS35BI- 1200 -152- 63-00	1200	450	1448	1316	419	1207	523	1107	583	265	240	34.7	74
SABS35BI- 1350 -152- 63-00	1350	500	1600	1460	436	1339	552	1227	618	265	240	37.9	86
SABS35BI- 1500 -152- 63-00	1500	560	1752	1633	476	1498	606	1372	681	285	310	41.7	94
SABS35BI- 1650 -152- 63-00	1650	610	1904	1776	494	1630	635	1493	716	285	310	45.0	106
SABS35BI- 1800 -152- 63-00	1800	660	2058	1920	511	1762	663	1614	752	285	310	48.3	119
SABS35BI- 2000 -152- 63-00	2000	740	2260	2151	538	1973	709	1807	808	285	310	53.5	141
SABS35BI- 2100 -152- 63-00	2100	765	2362	2223	547	2039	724	1867	826	285	310	55.1	146
SABS35BI- 2200 -152- 63-00	2200	800	2464	2324	558	2131	744	1952	850	285	310	59.0	166
SABS35BI- 2400 -152- 63-00	2400	870	2668	2525	582	2316	784	2121	900	285	310	61.9	183

SABS SERIES S 35				178 DIAMETER						BEARING 630 7-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS35BI- 1200 -178- 63-00	1200	450	1448	1316	432	1207	536	1107	596	278	240	40.6	80
SABS35BI- 1350 -178- 63-00	1350	500	1600	1460	449	1339	565	1227	631	278	240	44.4	94
SABS35BI- 1500 -178- 63-00	1500	560	1752	1633	489	1498	619	1372	694	298	310	48.9	102
SABS35BI- 1650 -178- 63-00	1650	610	1904	1776	507	1630	648	1493	729	298	310	52.7	115
SABS35BI- 1800 -178- 63-00	1800	660	2058	1920	524	1762	676	1614	765	298	310	56.5	129
SABS35BI- 2000 -178- 63-00	2000	740	2260	2151	551	1973	722	1807	821	298	310	62.6	152
SABS35BI- 2100 -178- 63-00	2100	765	2362	2223	560	2039	737	1867	839	298	310	64.5	157
SABS35BI- 2200 -178- 63-00	2200	800	2464	2324	571	2131	757	1952	863	298	310	67.2	170
SABS35BI- 2400 -178- 63-00	2400	870	2668	2525	595	2316	797	2121	913	298	310	72.5	195

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL TROUGHING IN-LINE IDLER **SABS SERIES 40**

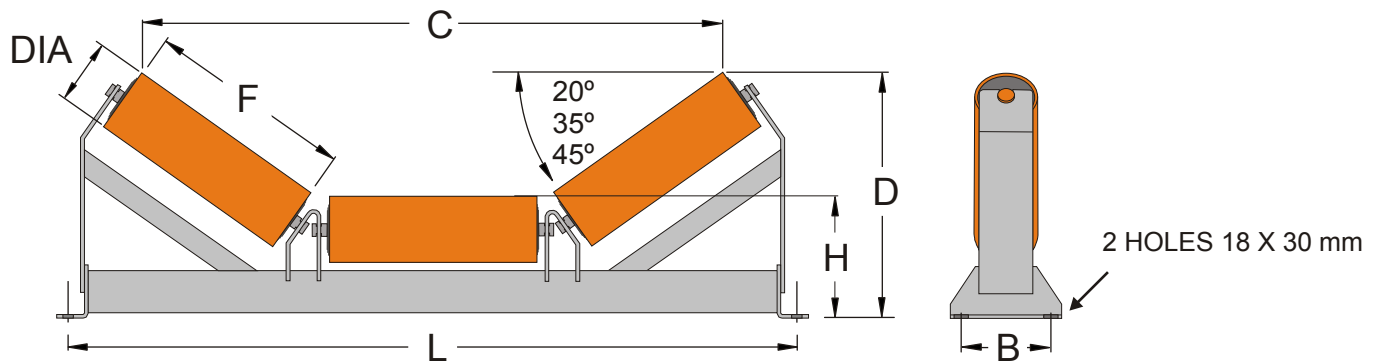


SABS SERIES S 40				152 DIAMETER						BEARING 630 8-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS40BI- 1200 -152- 63-00	1200	450	1448	1316	439	1207	543	1107	603	285	240	38.1	80
SABS40BI- 1350 -152- 63-00	1350	500	1600	1460	456	1339	572	1227	638	285	240	41.4	94
SABS40BI- 1500 -152- 63-00	1500	560	1752	1633	501	1498	631	1372	706	310	310	45.3	102
SABS40BI- 1650 -152- 63-00	1650	610	1904	1776	519	1630	660	1493	741	310	310	48.5	115
SABS40BI- 1800 -152- 63-00	1800	660	2058	1920	536	1762	688	1614	777	310	310	51.8	128
SABS40BI- 2000 -152- 63-00	2000	740	2260	2151	563	1973	734	1807	833	310	310	57.0	150
SABS40BI- 2100 -152- 63-00	2100	765	2362	2223	572	2039	749	1867	851	310	310	58.6	155
SABS40BI- 2200 -152- 63-00	2200	800	2464	2324	583	2131	769	1952	875	310	310	60.8	168
SABS40BI- 2400 -152- 63-00	2400	870	2668	2525	607	2316	809	2121	925	310	310	65.4	193

SABS SERIES S 40				178 DIAMETER						BEARING 630 8-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS40BI- 1200 -178- 63-00	1200	450	1448	1316	452	1207	556	1107	616	298	240	44.0	87
SABS40BI- 1350 -178- 63-00	1350	500	1600	1460	469	1339	585	1227	651	298	240	47.8	101
SABS40BI- 1500 -178- 63-00	1500	560	1752	1633	514	1498	644	1372	719	323	310	52.4	110
SABS40BI- 1650 -178- 63-00	1650	610	1904	1776	532	1630	673	1493	754	323	310	56.2	124
SABS40BI- 1800 -178- 63-00	1800	660	2058	1920	549	1762	701	1614	790	323	310	60.0	138
SABS40BI- 2000 -178- 63-00	2000	740	2260	2151	576	1973	747	1807	846	323	310	66.0	161
SABS40BI- 2100 -178- 63-00	2100	765	2362	2223	585	2039	762	1867	864	323	310	68.0	167
SABS40BI- 2200 -178- 63-00	2200	800	2464	2324	596	2131	782	1952	888	323	310	68.4	177
SABS40BI- 2400 -178- 63-00	2400	870	2668	2525	620	2316	822	2121	938	323	310	69.1	198

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL BELT FRIENDLY IDLER **SABS SERIES 25**

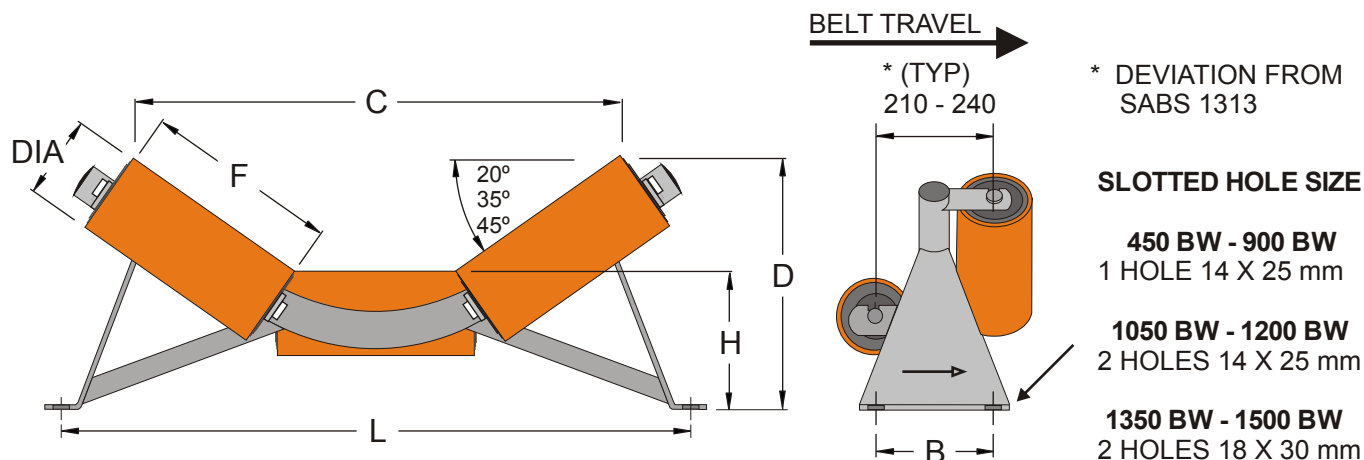


SABS SERIES S 25				127 DIAMETER						BEARING 620 5-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABSS25BF- 450 -127- 62-00	450	190	686	527	268	481	312	439	337	203	0	10.2	18
SABSS25BF- 500 -127- 62-00	500	200	736	556	271	508	318	463	344	203	0	10.5	19
SABSS25BF- 600 -127- 62-00	600	240	838	671	285	613	341	560	373	203	0	11.9	22
SABFS25BF- 750 -127- 62-00	750	290	990	815	302	745	369	680	408	203	0	13.6	26
SABSS25BF- 900 -127- 62-00	900	340	1144	959	319	877	398	801	443	203	0	15.4	33
SABSS25BF- 1050 -127- 62-00	1050	390	1296	1103	336	1009	427	922	479	203	100	17.1	36
SABSS25BF- 1200 -127- 62-00	1200	450	1448	1276	357	1167	461	1067	521	203	100	19.2	42
SABSS25BF- 1350 -127- 62-00	1350	500	1600	1420	374	1299	490	1187	556	203	240	20.9	46
SABSS25BF- 1500 -127- 62-00	1500	560	1752	1593	394	1458	524	1332	599	203	240	23.0	53

SABS SERIES S 25				152 DIAMETER						BEARING 620 5-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25BF- 450 -152- 62-00	450	190	686	527	280	481	324	439	349	215	0	12.9	21
SABS25BF- 500 -152- 62-00	500	200	736	556	283	508	330	463	356	215	0	13.3	22
SABS25BF- 600 -152- 62-00	600	240	838	671	297	613	353	560	385	215	0	15.0	26
SABS25BF- 750 -152- 62-00	750	290	990	815	314	745	381	680	420	215	0	17.2	31
SABS25BF- 900 -152- 62-00	900	340	1144	959	331	877	410	801	455	215	0	19.4	37
SABS25BF- 1050 -152- 62-00	1050	390	1296	1103	348	1009	439	922	491	215	100	21.6	41
SABS25BF- 1200 -152- 62-00	1200	450	1448	1276	369	1167	473	1067	533	215	100	24.3	48
SABS25BF- 1350 -152- 62-00	1350	500	1600	1420	386	1299	502	1187	568	215	240	26.5	52
SABS25BF- 1500 -152- 62-00	1500	560	1752	1593	406	1458	536	1332	611	215	240	29.1	60

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL BELT FRIENDLY IDLER **SABS SERIES 30**

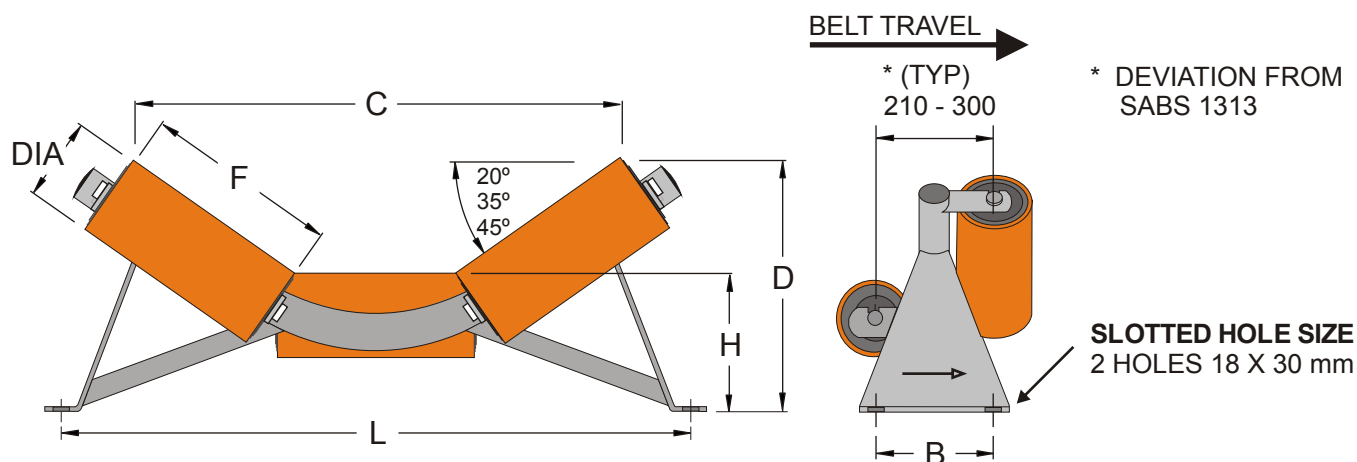


SABS SERIES S 30				152 DIAMETER						BEARING 620 6-2RS			
PART NUMBER	BW	F	L	20 °		35 °		45 °		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS30BF- 750 -152- 62-00	750	290	990	815	364	745	431	680	470	265	240	17.7	35
SABS30BF- 900 -152- 62-00	900	340	1144	959	381	877	460	801	505	265	240	19.9	41
SABS30BF- 1050 -152- 62-00	1050	390	1296	1103	398	1009	489	922	541	265	240	21.7	45
SABS30BF- 1200 -152- 62-00	1200	450	1448	1276	419	1167	523	1067	583	265	240	24.7	53
SABS30BF- 1350 -152- 62-00	1350	500	1600	1420	436	1299	552	1187	618	265	240	26.9	58
SABS30BF- 1500 -152- 62-00	1500	560	1752	1593	476	1458	606	1332	681	285	240	29.6	68
SABS30BF- 1650 -152- 62-00	1650	610	1904	1736	494	1590	635	1453	716	285	310	31.5	76
SABS30BF- 1800 -152- 62-00	1800	660	2058	1880	511	1722	663	1574	752	285	310	34.0	83

SABS SERIES S 30				178 DIAMETER						BEARING 630 6-2RS			
PART NUMBER	BW	F	L	20 °		35 °		45 °		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS30BF- 750 -178- 63-00	750	290	990	815	377	745	444	680	483	278	240	21.9	40
SABS30BF- 900 -178- 63-00	900	340	1144	959	394	877	473	801	518	278	240	24.5	46
SABS30BF- 1050 -178- 63-00	1050	390	1296	1103	411	1009	502	922	554	278	240	27.0	51
SABS30BF- 1200 -178- 63-00	1200	450	1448	1276	432	1167	536	1067	596	278	240	30.0	58
SABS30BF- 1350 -178- 63-00	1350	500	1600	1420	449	1299	565	1187	631	278	240	32.6	64
SABS30BF- 1500 -178- 63-00	1500	560	1752	1593	489	1458	619	1332	694	298	240	35.8	75
SABS30BF- 1650 -178- 63-00	1650	610	1904	1736	507	1590	648	1453	729	298	310	38.0	83
SABS30BF- 1800 -178- 63-00	1800	660	2058	1880	524	1722	676	1574	765	298	310	40.9	91

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL BELT FRIENDLY IDLER SABS SERIES 35

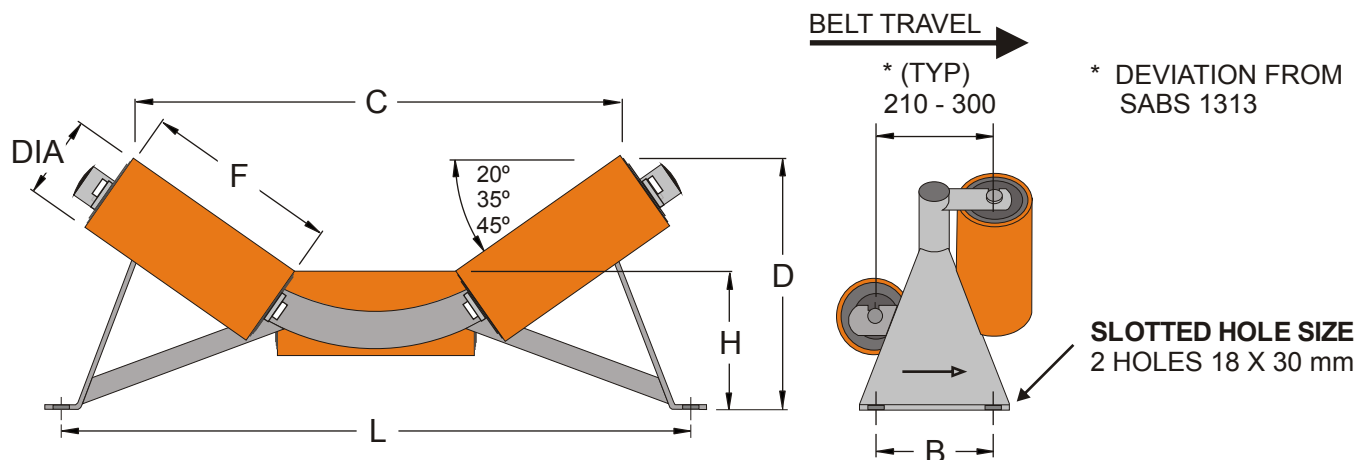


SABS SERIES S 35				152 DIAMETER						BEARING 630 7-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS35BF- 1200 -152- 63-00	1200	450	1448	1276	419	1167	523	1067	583	265	240	34.7	69
SABS35BF- 1350 -152- 63-00	1350	500	1600	1420	436	1299	552	1187	618	265	240	37.9	79
SABS35BF- 1500 -152- 63-00	1500	560	1752	1593	476	1458	606	1332	681	285	310	41.7	87
SABS35BF- 1650 -152- 63-00	1650	610	1904	1736	494	1590	635	1453	716	285	310	45.0	98
SABS35BF- 1800 -152- 63-00	1800	660	2058	1880	511	1722	663	1574	752	285	310	48.3	109
SABS35BF- 2000 -152- 63-00	2000	740	2260	2111	538	1933	709	1767	808	285	310	53.5	128
SABS35BF- 2100 -152- 63-00	2100	765	2362	2183	547	1999	724	1827	826	285	310	55.1	132
SABS35BF- 2200 -152- 63-00	2200	800	2464	2284	558	2091	744	1912	850	285	310	59.0	150
SABS35BF- 2400 -152- 63-00	2400	870	2668	2485	582	2276	784	2081	900	285	310	61.9	164

SABS SERIES S 35				178 DIAMETER						BEARING 630 7-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS35BF- 1200 -178- 63-00	1200	450	1448	1276	432	1167	536	1067	596	278	240	40.6	75
SABS35BF- 1350 -178- 63-00	1350	500	1600	1420	449	1299	565	1187	631	278	240	44.4	87
SABS35BF- 1500 -178- 63-00	1500	560	1752	1593	489	1458	619	1332	694	298	310	48.9	95
SABS35BF- 1650 -178- 63-00	1650	610	1904	1736	507	1590	648	1453	729	298	310	52.7	107
SABS35BF- 1800 -178- 63-00	1800	660	2058	1880	524	1722	676	1574	765	298	310	56.5	119
SABS35BF- 2000 -178- 63-00	2000	740	2260	2111	551	1933	722	1767	821	298	310	62.6	129
SABS35BF- 2100 -178- 63-00	2100	765	2362	2183	560	1999	737	1827	839	298	310	64.5	132
SABS35BF- 2200 -178- 63-00	2200	800	2464	2284	571	2091	757	1912	863	298	310	67.2	150
SABS35BF- 2400 -178- 63-00	2400	870	2668	2485	595	2276	797	2081	913	298	310	72.5	176

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL BELT FRIENDLY IDLER **SABS SERIES 40**

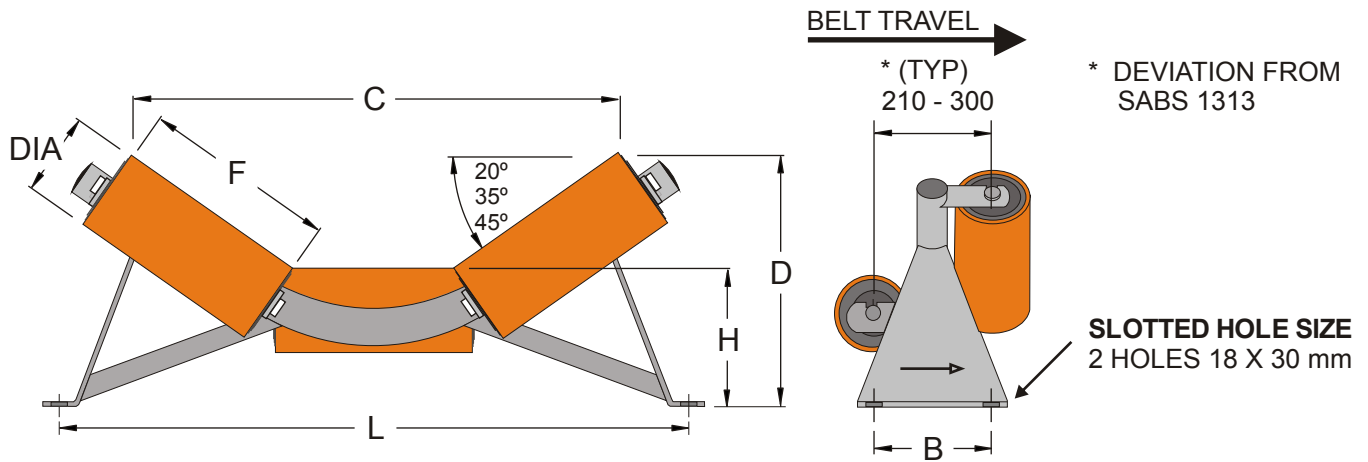


SABS SERIES S 40				152 DIAMETER						BEARING 630 8-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS40BF- 1200 -152- 63-00	1200	450	1448	1276	439	1167	543	1067	603	285	240	38.1	75
SABS40BF- 1350 -152- 63-00	1350	500	1600	1420	456	1299	572	1187	638	285	240	41.4	87
SABS40BF- 1500 -152- 63-00	1500	560	1752	1593	501	1458	631	1332	706	310	310	45.3	95
SABS40BF- 1650 -152- 63-00	1650	610	1904	1736	519	1590	660	1453	741	310	310	48.5	107
SABS40BF- 1800 -152- 63-00	1800	660	2058	1880	536	1722	688	1574	777	310	310	51.8	118
SABS40BF- 2000 -152- 63-00	2000	740	2260	2111	563	1933	734	1767	833	310	310	57.0	137
SABS40BF- 2100 -152- 63-00	2100	765	2362	2183	572	1999	749	1827	851	310	310	58.6	141
SABS40BF- 2200 -152- 63-00	2200	800	2464	2284	583	2091	769	1912	875	310	310	60.8	152
SABS40BF- 2400 -152- 63-00	2400	870	2668	2485	607	2276	809	2081	925	310	310	65.4	174

SABS SERIES S 40				178 DIAMETER						BEARING 630 8-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS40BF- 1200 -178- 63-00	1200	450	1448	1276	452	1167	556	1067	616	298	240	44.0	82
SABS40BF- 1350 -178- 63-00	1350	500	1600	1420	469	1299	585	1187	651	298	240	47.8	94
SABS40BF- 1500 -178- 63-00	1500	560	1752	1593	514	1458	644	1332	719	323	310	52.4	103
SABS40BF- 1650 -178- 63-00	1650	610	1904	1736	532	1590	673	1453	754	323	310	56.2	116
SABS40BF- 1800 -178- 63-00	1800	660	2058	1880	549	1722	701	1574	790	323	310	60.0	128
SABS40BF- 2000 -178- 63-00	2000	740	2260	2111	576	1933	747	1767	846	323	310	66.0	148
SABS40BF- 2100 -178- 63-00	2100	765	2362	2183	585	1999	762	1827	864	323	310	68.0	153
SABS40BF- 2200 -178- 63-00	2200	800	2464	2284	596	2091	782	1912	888	323	310	68.4	161
SABS40BF- 2400 -178- 63-00	2400	870	2668	2485	620	2276	822	2081	938	323	310	69.1	179

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL TROUGHING OFFSET IDLER **SABS SERIES 25**

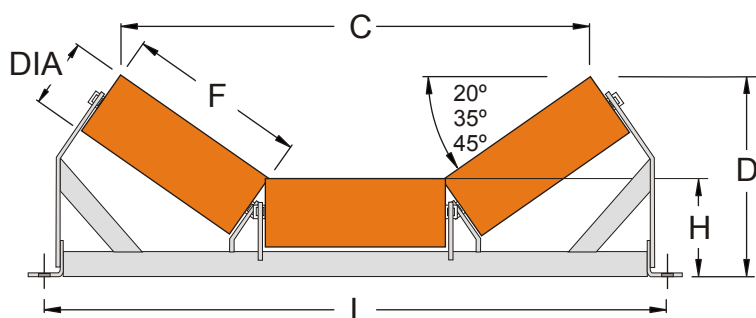

SLOTTED HOLE SIZE

450BW - 900BW
1 HOLE - 14X25mm

1050BW - 1200BW
2 HOLES - 14X25mm

1350BW - 1500BW
2 HOLES - 18X30mm


SABS SERIES S 25				127 DIAMETER						BEARING 620 5-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25B- 450 -127- 62-00	450	190	686	527	268	481	312	439	337	203	0	10.2	19
SABS25B- 500 -127- 62-00	500	200	736	556	271	508	318	463	344	203	0	10.5	20
SABS25B- 600 -127- 62-00	600	240	838	671	285	613	341	560	373	203	0	11.9	23
SABS25B- 750 -127- 62-00	750	290	990	815	302	745	369	680	408	203	0	13.6	27
SABS25B- 900 -127- 62-00	900	340	1144	959	319	877	398	801	443	203	0	15.4	34
SABS25B- 1050 -127- 62-00	1050	390	1296	1103	336	1009	427	922	479	203	100	17.1	37
SABS25B- 1200 -127- 62-00	1200	450	1448	1276	357	1167	461	1067	521	203	100	19.2	44
SABS25B- 1350 -127- 62-00	1350	500	1600	1420	374	1299	490	1187	556	203	240	20.9	48
SABS25B- 1500 -127- 62-00	1500	560	1752	1593	394	1458	524	1332	599	203	240	23.0	55

SABS SERIES S 25				152 DIAMETER						BEARING 620 5-2RS			
PART NUMBER	BW	F	L	20 °		35 °		45 °		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25B- 450 -152- 62-00	450	190	686	527	280	481	324	439	349	215	0	12.9	22
SABS25B- 500 -152- 62-00	500	200	736	556	283	508	330	463	356	215	0	13.3	23
SABS25B- 600 -152- 62-00	600	240	838	671	297	613	353	560	385	215	0	15.0	27
SABS25B- 750 -152- 62-00	750	290	990	815	314	745	381	680	420	215	0	17.2	32
SABS25B- 900 -152- 62-00	900	340	1144	959	331	877	410	801	455	215	0	19.4	38
SABS25B- 1050 -152- 62-00	1050	390	1296	1103	348	1009	439	922	491	215	100	21.6	42
SABS25B- 1200 -152- 62-00	1200	450	1448	1276	369	1167	473	1067	533	215	100	24.3	50
SABS25B- 1350 -152- 62-00	1350	500	1600	1420	386	1299	502	1187	568	215	240	26.5	54
SABS25B- 1500 -152- 62-00	1500	560	1752	1593	406	1458	536	1332	611	215	240	29.1	62

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL TROUGHING OFFSET IDLER **SABS SERIES 30**

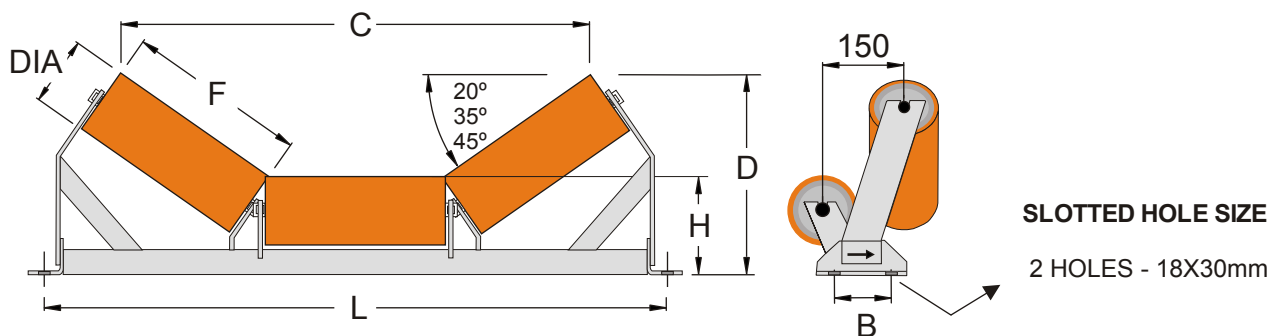


SABS SERIES S 30				152 DIAMETER						BEARING 620 6-2RS			
PART NUMBER	BW	F	L	20 °		35 °		45 °		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS30B- 750 -152- 62-00	750	290	990	815	364	745	431	680	470	265	240	17.7	37
SABS30B- 900 -152- 62-00	900	340	1144	959	381	877	460	801	505	265	240	19.9	44
SABS30B- 1050 -152- 62-00	1050	390	1296	1103	398	1009	489	922	541	265	240	21.7	48
SABS30B- 1200 -152- 62-00	1200	450	1448	1276	419	1167	523	1067	583	265	240	24.7	56
SABS30B- 1350 -152- 62-00	1350	500	1600	1420	436	1299	552	1187	618	265	240	26.9	62
SABS30B- 1500 -152- 62-00	1500	560	1752	1593	476	1458	606	1332	681	285	240	29.6	73
SABS30B- 1650 -152- 62-00	1650	610	1904	1736	494	1590	635	1453	716	285	310	31.5	82
SABS30B- 1800 -152- 62-00	1800	660	2058	1880	511	1722	663	1574	752	285	310	34.0	90

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL TROUGHING OFFSET IDLER **SABS SERIES 30**

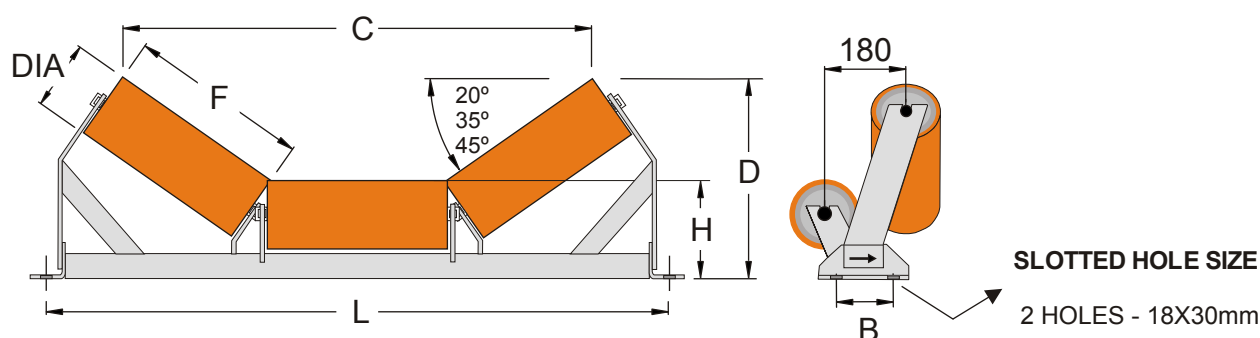


SABS SERIES S 30				178 DIAMETER				BEARING 630 6-2RS					
PART NUMBER	BW	F	L	20 °		35 °		45 °		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS30B- 750 -178- 63-00	750	290	990	815	377	745	444	680	483	278	240	21.9	42
SABS30B- 900 -178- 63-00	900	340	1144	959	394	877	473	801	518	278	240	24.5	49
SABS30B- 1050 -178- 63-00	1050	390	1296	1103	411	1009	502	922	554	278	240	27.0	54
SABS30B- 1200 -178- 63-00	1200	450	1448	1276	432	1167	536	1067	596	278	240	30.0	62
SABS30B- 1350 -178- 63-00	1350	500	1600	1420	449	1299	565	1187	631	278	240	32.6	68
SABS30B- 1500 -178- 63-00	1500	560	1752	1593	489	1458	619	1332	694	298	240	35.8	80
SABS30B- 1650 -178- 63-00	1650	610	1904	1736	507	1590	648	1453	729	298	310	38.0	89
SABS30B- 1800 -178- 63-00	1800	660	2058	1880	524	1722	676	1574	765	298	310	40.9	98

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL TROUGHING OFFSET IDLER **SABS SERIES 35**

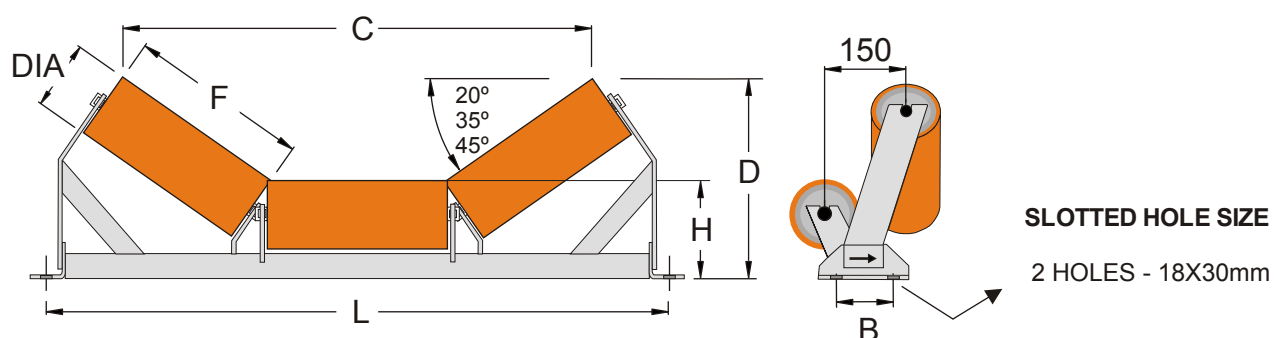


SABS SERIES S 35				152 DIAMETER						BEARING 630 7-2RS			
PART NUMBER	BW	F	L	20 °		35 °		45 °		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS35B- 1200 -152- 63-00	1200	450	1448	1276	419	1167	523	1067	583	265	240	34.7	74
SABS35B- 1350 -152- 63-00	1350	500	1600	1420	436	1299	552	1187	618	265	240	37.9	86
SABS35B- 1500 -152- 63-00	1500	560	1752	1593	476	1458	606	1332	681	285	310	41.7	94
SABS35B- 1650 -152- 63-00	1650	610	1904	1736	494	1590	635	1453	716	285	310	45.0	106
SABS35B- 1800 -152- 63-00	1800	660	2058	1880	511	1722	663	1574	752	285	310	48.3	119
SABS35B- 2000 -152- 63-00	2000	740	2260	2111	538	1933	709	1767	808	285	310	53.5	141
SABS35B- 2100 -152- 63-00	2100	765	2362	2183	547	1999	724	1827	826	285	310	55.1	146
SABS35B- 2200 -152- 63-00	2200	800	2464	2284	558	2091	744	1912	850	285	310	59.0	166
SABS35B- 2400 -152- 63-00	2400	870	2668	2485	582	2276	784	2081	900	285	310	61.9	183

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL TROUGHING OFFSET IDLER **SABS SERIES 35**

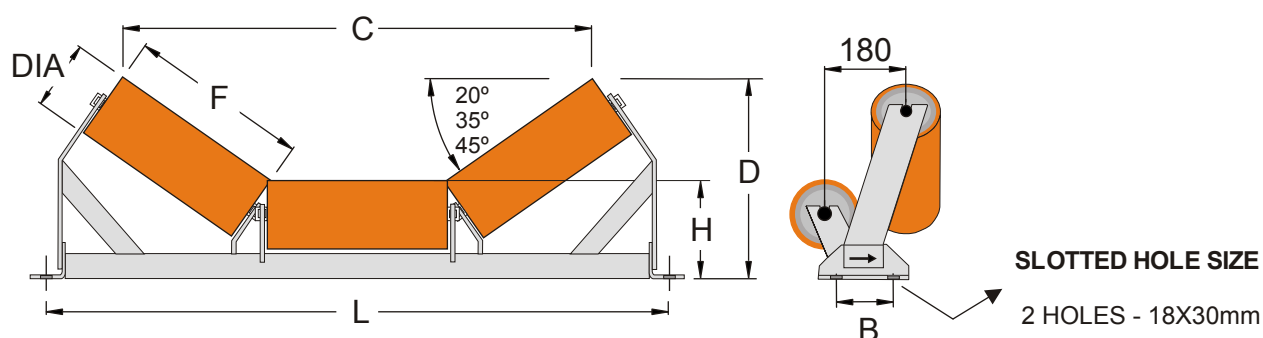


SABS SERIES S 35				178 DIAMETER						BEARING 630 7-2RS			
PART NUMBER	BW	F	L	20 °		35 °		45 °		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS35B- 1200 -178- 63-00	1200	450	1448	1276	432	1167	536	1067	596	278	240	40.6	80
SABS35B- 1350 -178- 63-00	1350	500	1600	1420	449	1299	565	1187	631	278	240	44.4	94
SABS35B- 1500 -178- 63-00	1500	560	1752	1593	489	1458	619	1332	694	298	310	48.9	102
SABS35B- 1650 -178- 63-00	1650	610	1904	1736	507	1590	648	1453	729	298	310	52.7	115
SABS35B- 1800 -178- 63-00	1800	660	2058	1880	524	1722	676	1574	765	298	310	56.5	129
SABS35B- 2000 -178- 63-00	2000	740	2260	2111	551	1933	722	1767	821	298	310	62.6	152
SABS35B- 2100 -178- 63-00	2100	765	2362	2183	560	1999	737	1827	839	298	310	64.5	157
SABS35B- 2200 -178- 63-00	2200	800	2464	2284	571	2091	757	1912	863	298	310	67.2	170
SABS35B- 2400 -178- 63-00	2400	870	2668	2485	595	2276	797	2081	913	298	310	72.5	195

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL TROUGHING OFFSET IDLER **SABS SERIES 40**

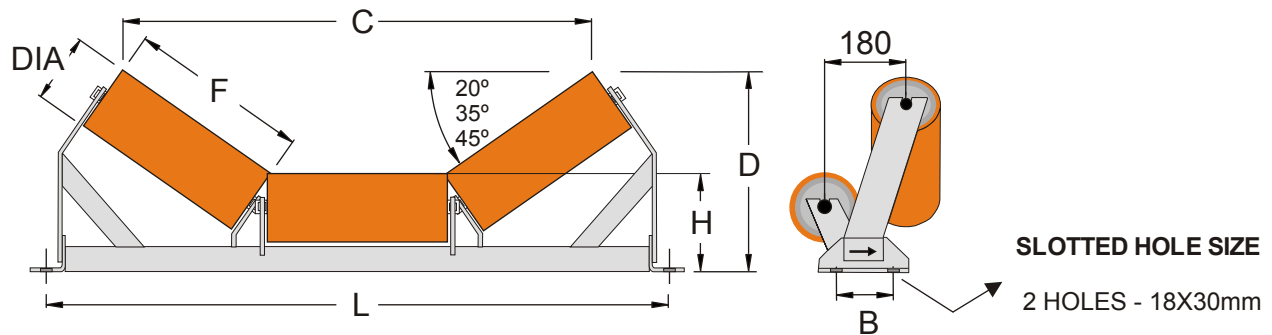


SABS SERIES S 40				178 DIAMETER						BEARING 630 8-2RS			
PART NUMBER	BW	F	L	20 °		35 °		45 °		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS40B- 1200 -178- 63-00	1200	450	1448	1276	452	1167	556	1067	616	298	240	44.0	87
SABS40B- 1350 -178- 63-00	1350	500	1600	1420	469	1299	585	1187	651	298	240	47.8	101
SABS40B- 1500 -178- 63-00	1500	560	1752	1593	514	1458	644	1332	719	323	310	52.4	110
SABS40B- 1650 -178- 63-00	1650	610	1904	1736	532	1590	673	1453	754	323	310	56.2	124
SABS40B- 1800 -178- 63-00	1800	660	2058	1880	549	1722	701	1574	790	323	310	60.0	138
SABS40B- 2000 -178- 63-00	2000	740	2260	2111	576	1933	747	1767	846	323	310	66.0	161
SABS40B- 2100 -178- 63-00	2100	765	2362	2183	585	1999	762	1827	864	323	310	68.0	167
SABS40B- 2200 -178- 63-00	2200	800	2464	2284	596	2091	782	1912	888	323	310	68.4	177
SABS40B- 2400 -178- 63-00	2400	870	2668	2485	620	2276	822	2081	938	323	310	69.1	198

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL IMPACT OFFSET IDLER **SABS SERIES 25**

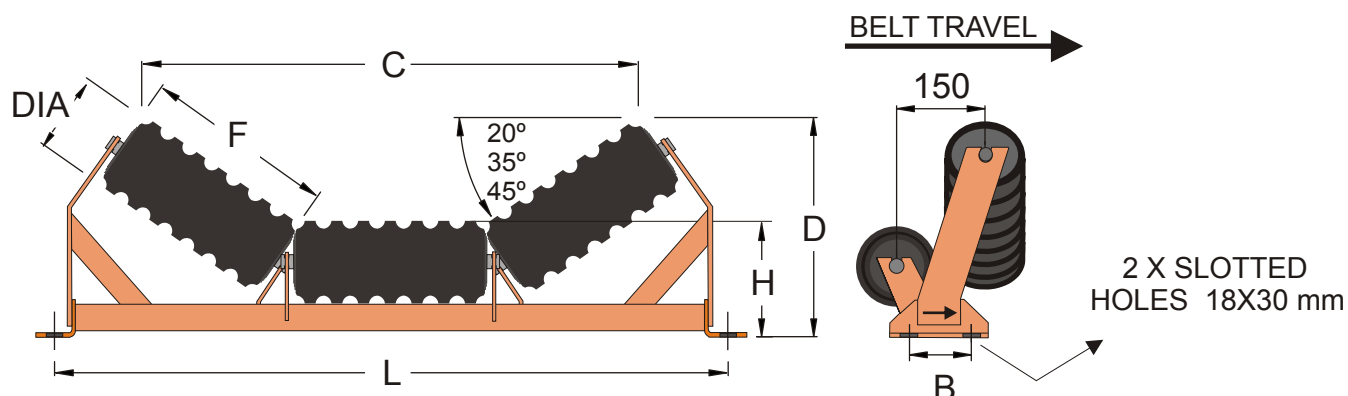


SABS SERIES S 25				127 DIAMETER						BEARING 620 5-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25K- 450 -127- 62-00	450	190	686	527	268	481	312	439	337	203	150	9.5	20
SABS25K- 500 -127- 62-00	500	200	736	556	271	508	318	463	344	203	150	9.6	22
SABS25K- 600 -127- 62-00	600	240	838	671	285	613	341	560	373	203	150	11.3	25
SABS25K- 750 -127- 62-00	750	290	990	815	302	745	369	680	408	203	150	12.3	31
SABS25K- 900 -127- 62-00	900	340	1144	959	319	877	398	801	443	203	150	15.0	38
SABS25K- 1050 -127- 62-00	1050	390	1296	1103	336	1009	427	922	479	203	150	16.9	42
SABS25K- 1200 -127- 62-00	1200	450	1448	1276	357	1167	461	1067	521	203	150	19.0	49
SABS25K- 1350 -127- 62-00	1350	500	1600	1420	374	1299	490	1187	556	203	240	20.8	55
SABS25K- 1500 -127- 62-00	1500	560	1752	1593	394	1458	524	1332	599	203	240	23.7	59

SABS SERIES S 25				133 DIAMETER						BEARING 620 5-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25K- 450 -133- 62-00	450	190	686	527	271	481	315	439	340	206	150	10.2	21
SABS25K- 500 -133- 62-00	500	200	736	556	274	508	321	463	347	206	150	10.7	22
SABS25K- 600 -133- 62-00	600	240	838	671	288	613	344	560	376	206	150	12.2	26
SABS25K- 750 -133- 62-00	750	290	990	815	305	745	372	680	411	206	150	14.2	33
SABS25K- 900 -133- 62-00	900	340	1144	959	322	877	401	801	446	206	150	16.3	39
SABS25K- 1050 -133- 62-00	1050	390	1296	1103	339	1009	430	922	482	206	150	18.3	44
SABS25K- 1200 -133- 62-00	1200	450	1448	1276	360	1167	464	1067	524	206	150	20.5	50
SABS25K- 1350 -133- 62-00	1350	500	1600	1420	377	1299	493	1187	559	206	240	22.6	56
SABS25K- 1500 -133- 62-00	1500	560	1752	1593	397	1458	527	1332	602	206	240	25.6	61

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL IMPACT OFFSET IDLER **SABS SERIES 25**

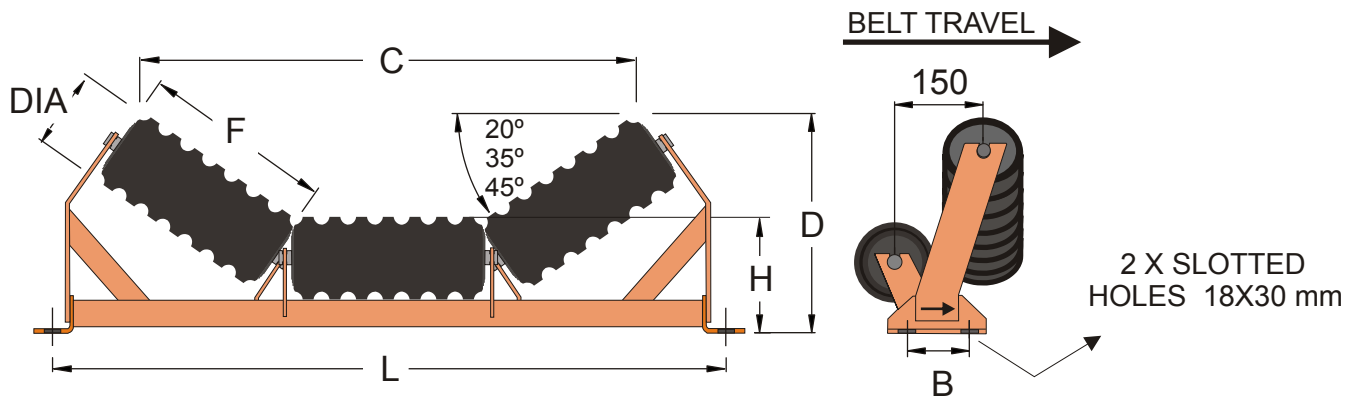


SABS SERIES S 25				152 DIAMETER						BEARING 620 5-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25K- 450 -152- 62-00	450	190	686	527	280	481	324	439	349	215	150	12.9	24
SABS25K- 500 -152- 62-00	500	200	736	556	283	508	330	463	356	215	150	13.1	25
SABS25K- 600 -152- 62-00	600	240	838	671	297	613	353	560	385	215	150	15.5	29
SABS25K- 750 -152- 62-00	750	290	990	815	314	745	381	680	420	215	150	18.2	37
SABS25K- 900 -152- 62-00	900	340	1144	959	331	877	410	801	455	215	150	20.8	44
SABS25K- 1050 -152- 62-00	1050	390	1296	1103	348	1009	439	922	491	215	150	23.8	49
SABS25K- 1200 -152- 62-00	1200	450	1448	1276	369	1167	473	1067	533	215	150	25.0	55
SABS25K- 1350 -152- 62-00	1350	500	1600	1420	386	1299	502	1187	568	215	240	29.0	63
SABS25K- 1500 -152- 62-00	1500	560	1752	1593	406	1458	536	1332	611	215	240	31.9	67

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL IMPACT OFFSET IDLER **SABS SERIES 25**

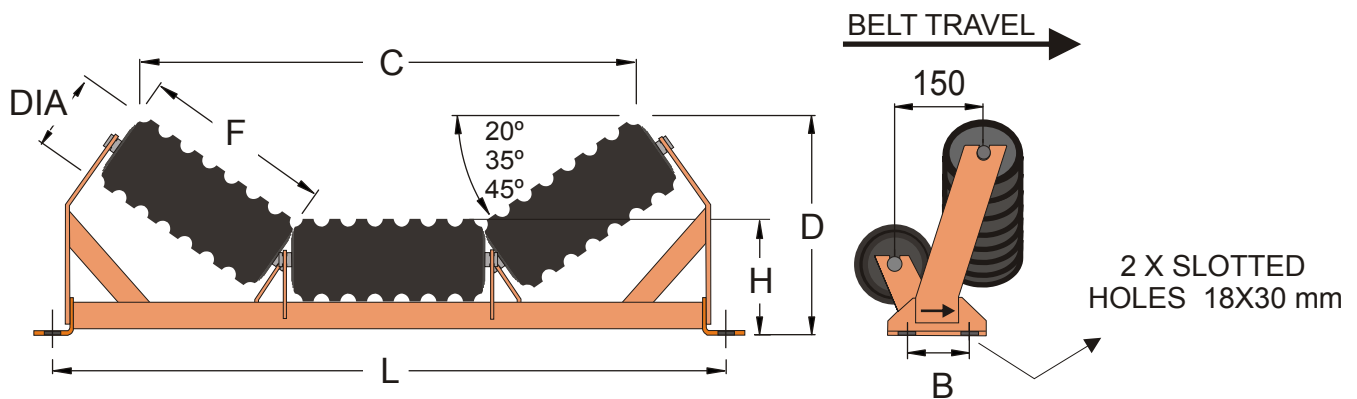


SABS SERIES S 25				159 DIAMETER						BEARING 620 5-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25K- 450 -159- 62-00	450	190	686	527	283	481	327	439	352	218	150	12.8	24
SABS25K- 500 -159- 62-00	500	200	736	556	286	508	333	463	359	218	150	13.0	25
SABS25K- 600 -159- 62-00	600	240	838	671	300	613	356	560	388	218	150	15.5	29
SABS25K- 750 -159- 62-00	750	290	990	815	317	745	384	680	423	218	150	18.2	37
SABS25K- 900 -159- 62-00	900	340	1144	959	334	877	413	801	458	218	150	20.9	44
SABS25K- 1050 -159- 62-00	1050	390	1296	1103	351	1009	442	922	494	218	150	23.6	49
SABS25K- 1200 -159- 62-00	1200	450	1448	1276	372	1167	476	1067	536	218	150	26.5	56
SABS25K- 1350 -159- 62-00	1350	500	1600	1420	389	1299	505	1187	571	218	240	31.5	66
SABS25K- 1500 -159- 62-00	1500	560	1752	1593	409	1458	539	1332	614	218	240	33.8	69

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL IMPACT OFFSET IDLER **SABS SERIES 30**

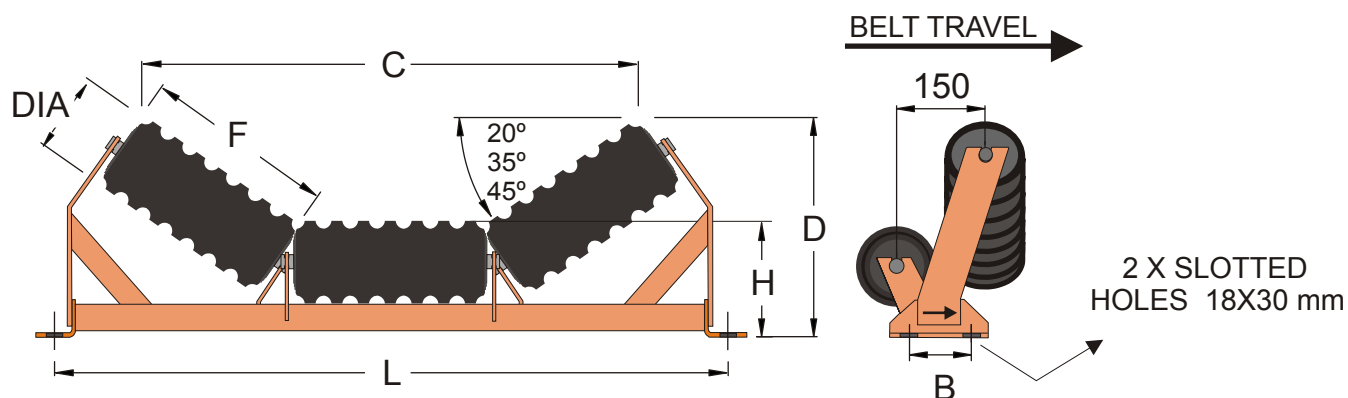


SABS SERIES S 30				152 DIAMETER						BEARING 620 6-2RS			
PART NUMBER	BW	F	L	20 °		35 °		45 °		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS30K- 750 -152- 62-00	750	290	990	815	364	745	431	680	470	265	240	19.0	42
SABS30K- 900 -152- 62-00	900	340	1144	959	381	877	460	801	505	265	240	21.6	51
SABS30K- 1050 -152- 62-00	1050	390	1296	1103	398	1009	489	922	541	265	240	24.2	56
SABS30K- 1200 -152- 62-00	1200	450	1448	1276	419	1167	523	1067	583	265	240	27.1	66
SABS30K- 1350 -152- 62-00	1350	500	1600	1420	436	1299	552	1187	618	265	240	29.8	71
SABS30K- 1500 -152- 62-00	1500	560	1752	1593	476	1458	606	1332	681	285	240	34.1	86
SABS30K- 1650 -152- 62-00	1650	610	1904	1736	494	1590	635	1453	716	285	310	35.5	96
SABS30K- 1800 -152- 62-00	1800	660	2058	1880	511	1722	663	1574	752	285	310	39.4	107

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL IMPACT OFFSET IDLER **SABS SERIES 30**

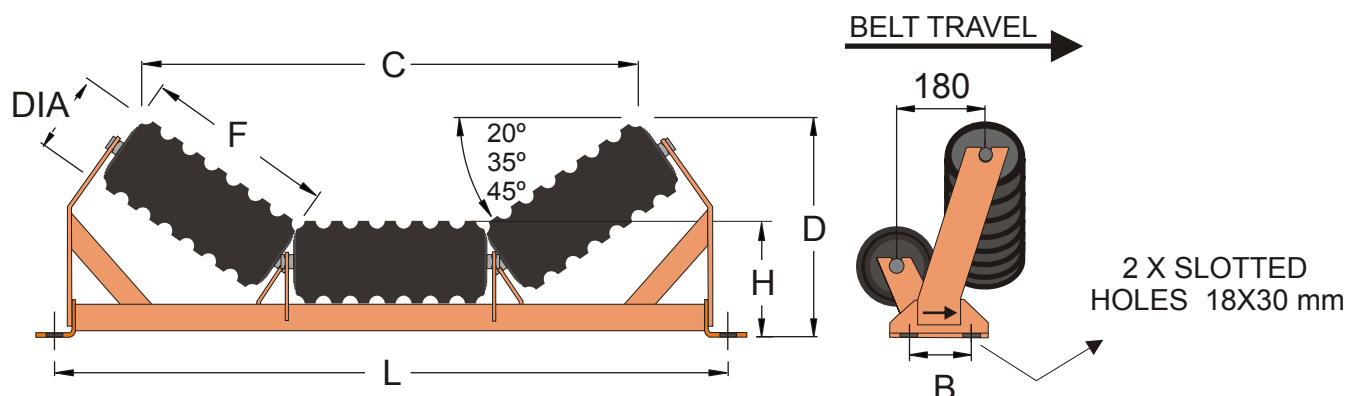


SABS SERIES 30				178 DIAMETER						BEARING 6306-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS30K- 750 -178- 63-00	750	290	990	815	377	745	444	680	483	278	240	25.2	48
SABS30K- 900 -178- 63-00	900	340	1144	959	394	877	473	801	518	278	240	28.6	58
SABS30K- 1050 -178- 63-00	1050	390	1296	1103	411	1009	502	922	554	278	240	32.0	65
SABS30K- 1200 -178- 63-00	1200	450	1448	1276	432	1167	536	1067	596	278	240	35.8	74
SABS30K- 1350 -178- 63-00	1350	500	1600	1420	449	1299	565	1187	631	278	240	39.2	81
SABS30K- 1500 -178- 63-00	1500	560	1752	1593	489	1458	619	1332	694	298	240	44.7	97
SABS30K- 1650 -178- 63-00	1650	610	1904	1736	507	1590	648	1453	729	298	310	46.0	106
SABS30K- 1800 -178- 63-00	1800	660	2058	1880	524	1722	676	1574	765	298	310	51.5	120

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

3 ROLL IMPACT OFFSET IDLER **SABS SERIES 40**

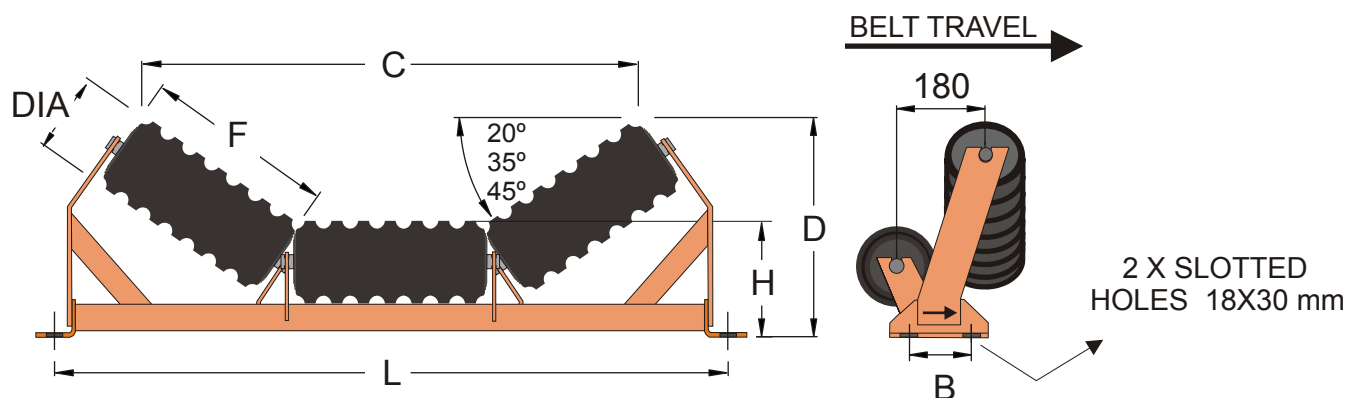


SABS SERIES S 40				178 DIAMETER						BEARING 630 8-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS40K- 1200 -178- 63-00	1200	450	1448	1276	452	1167	556	1067	616	298	240	38.6	88
SABS40K- 1350 -178- 63-00	1350	500	1600	1420	469	1299	585	1187	651	298	240	42.0	104
SABS40K- 1500 -178- 63-00	1500	560	1752	1593	514	1458	644	1332	719	323	310	47.5	114
SABS40K- 1650 -178- 63-00	1650	610	1904	1736	532	1590	673	1453	754	323	310	49.0	122
SABS40K- 1800 -178- 63-00	1800	660	2058	1880	549	1722	701	1574	790	323	310	54.3	145
SABS40K- 2000 -178- 63-00	2000	740	2260	2111	576	1933	747	1767	846	323	310	58.7	170
SABS40K- 2100 -178- 63-00	2100	765	2362	2183	585	1999	762	1827	864	323	310	61.3	177
SABS40K- 2200 -178- 63-00	2200	800	2464	2284	596	2091	782	1912	888	323	310	62.5	190
SABS40K- 2400 -178- 63-00	2400	870	2668	2485	620	2276	822	2081	938	323	310	65.1	220

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

5 ROLL IMPACT IDLER SABS SERIES 25

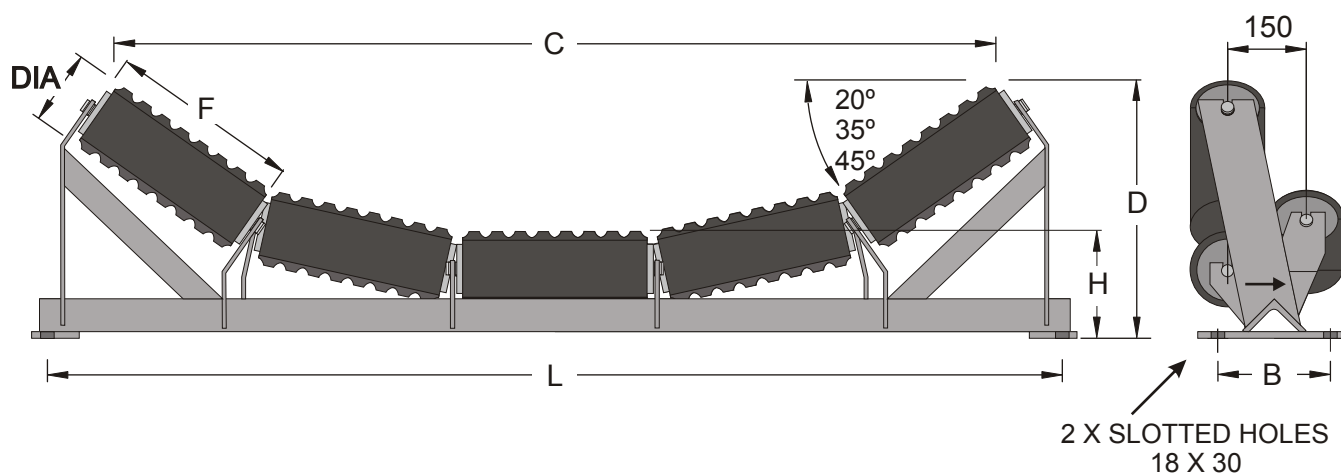


SABS SERIES 25				127 DIAMETER						BEARING 6205-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25K5- 1050 -127- 62-00	1050	240	1296	1124	322	1051	198	983	459	203	150	20.5	51
SABS25K5- 1200 -127- 62-00	1200	270	1448	1269	337	1187	198	1111	492	203	150	23.2	56
SABS25K5- 1350 -127- 62-00	1350	300	1600	1415	353	1324	198	1239	525	203	240	23.9	59
SABS25K5- 1500 -127- 62-00	1500	340	1752	1609	373	1506	198	1409	568	203	240	28.2	66
SABS25K5- 1650 -127- 62-00	1650	370	1904	1754	389	1642	198	1537	601	203	240	29.2	72
SABS25K5- 1800 -127- 62-00	1800	400	2058	1900	404	1778	198	1665	634	203	240	31.6	81

SABS SERIES S 25				133 DIAMETER						BEARING 620 5-2RS			
PART NUMBER	BW	F	L	20 °		35 °		45 °		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25K5- 1050 -133- 62-00	1050	240	1296	1124	325	1051	201	983	462	206	150	22.0	49
SABS25K5- 1200 -133- 62-00	1200	270	1448	1269	340	1187	201	1111	495	206	150	25.0	58
SABS25K5- 1350 -133- 62-00	1350	300	1600	1415	356	1324	201	1239	528	206	240	25.6	61
SABS25K5- 1500 -133- 62-00	1500	340	1752	1609	376	1506	201	1409	571	206	240	29.5	67
SABS25K5- 1650 -133- 62-00	1650	370	1904	1754	392	1642	201	1537	604	206	240	30.5	74
SABS25K5- 1800 -133- 62-00	1800	400	2058	1900	407	1778	201	1665	637	206	240	34.0	83

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

5 ROLL IMPACT IDLER SABS SERIES 25

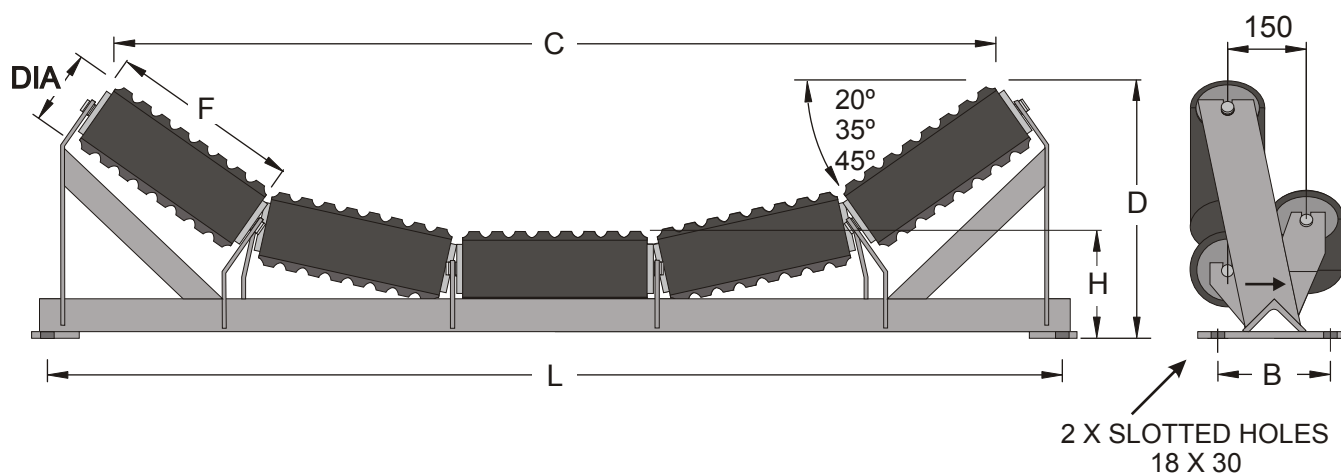


SABS SERIES 25				152 DIAMETER						BEARING 620 5-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25K5- 1050 -152- 62-00	1050	240	1296	1124	334	1051	420	983	471	215	150	27.5	58
SABS25K5- 1200 -152- 62-00	1200	270	1448	1269	349	1187	446	1111	504	215	150	31.5	64
SABS25K5- 1350 -152- 62-00	1350	300	1600	1415	365	1324	472	1239	537	215	240	32.3	67
SABS25K5- 1500 -152- 62-00	1500	340	1752	1609	385	1506	507	1409	580	215	240	38.0	76
SABS25K5- 1650 -152- 62-00	1650	370	1904	1754	401	1642	533	1537	613	215	240	39.2	83
SABS25K5- 1800 -152- 62-00	1800	400	2058	1900	416	1778	560	1665	646	215	240	42.8	92

SABS SERIES 25				159 DIAMETER						BEARING 6205-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25K5- 1050 -159- 62-00	1050	240	1296	1124	337	1051	423	983	474	218	150	27.2	58
SABS25K5- 1200 -159- 62-00	1200	270	1448	1269	352	1187	449	1111	507	218	150	31.4	64
SABS25K5- 1350 -159- 62-00	1350	300	1600	1415	368	1324	475	1239	540	218	240	32.0	67
SABS25K5- 1500 -159- 62-00	1500	340	1752	1609	388	1506	510	1409	583	218	240	37.6	75
SABS25K5- 1650 -159- 62-00	1650	370	1904	1754	404	1642	536	1537	616	218	240	38.6	82
SABS25K5- 1800 -159- 62-00	1800	400	2058	1900	419	1778	563	1665	649	218	240	42.4	91

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

5 ROLL IMPACT IDLER SABS SERIES 30

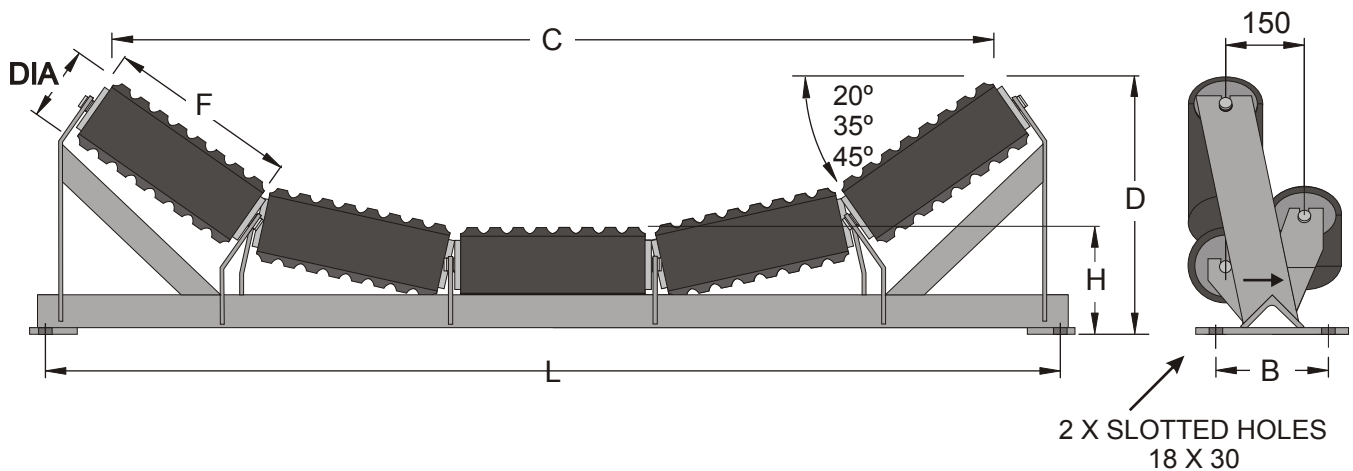


SABS SERIES S 30				152 DIAMETER						BEARING 620 6-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS30K5- 1050 -152- 62-00	1050	240	1296	1124	384	1051	470	983	521	265	240	28.7	62
SABS30K5- 1200 -152- 62-00	1200	270	1448	1269	399	1187	496	1111	554	265	240	32.7	68
SABS30K5- 1350 -152- 62-00	1350	300	1600	1415	415	1324	522	1239	587	265	240	33.6	79
SABS30K5- 1500 -152- 62-00	1500	340	1752	1609	455	1506	577	1409	650	285	240	39.2	86
SABS30K5- 1650 -152- 62-00	1650	370	1904	1754	471	1642	603	1537	683	285	310	40.4	98
SABS30K5- 1800 -152- 62-00	1800	400	2058	1900	486	1778	630	1665	716	285	310	44.0	110
SABS30K5- 2000 -152- 62-00	2000	450	2260	2142	512	2006	673	1878	770	285	310	48.4	120
SABS30K5- 2100 -152- 62-00	2100	475	2362	2263	525	2119	695	1985	797	285	310	51.8	127
SABS30K5- 2200 -152- 62-00	2200	490	2464	2336	533	2188	708	2049	814	285	310	52.4	138
SABS30K5- 2400 -152- 62-00	2400	536	2668	2559	556	2397	748	2245	864	285	310	56.7	161

SABS SERIES S 30				159 DIAMETER						BEARING 620 6-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS30K5- 1050 -159- 62-00	1050	240	1296	1124	387	1051	473	983	524	268	240	28.7	62
SABS30K5- 1200 -159- 62-00	1200	270	1448	1269	402	1187	499	1111	557	268	240	32.7	68
SABS30K5- 1350 -159- 62-00	1350	300	1600	1415	418	1324	525	1239	590	268	240	33.7	79
SABS30K5- 1500 -159- 62-00	1500	340	1752	1609	458	1506	580	1409	653	288	240	39.2	87
SABS30K5- 1650 -159- 62-00	1650	370	1904	1754	474	1642	606	1537	686	288	310	40.6	99
SABS30K5- 1800 -159- 62-00	1800	400	2058	1900	489	1778	633	1665	719	288	310	44.3	112

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

5 ROLL BELT FRIENDLY IDLER **SABS SERIES 25**

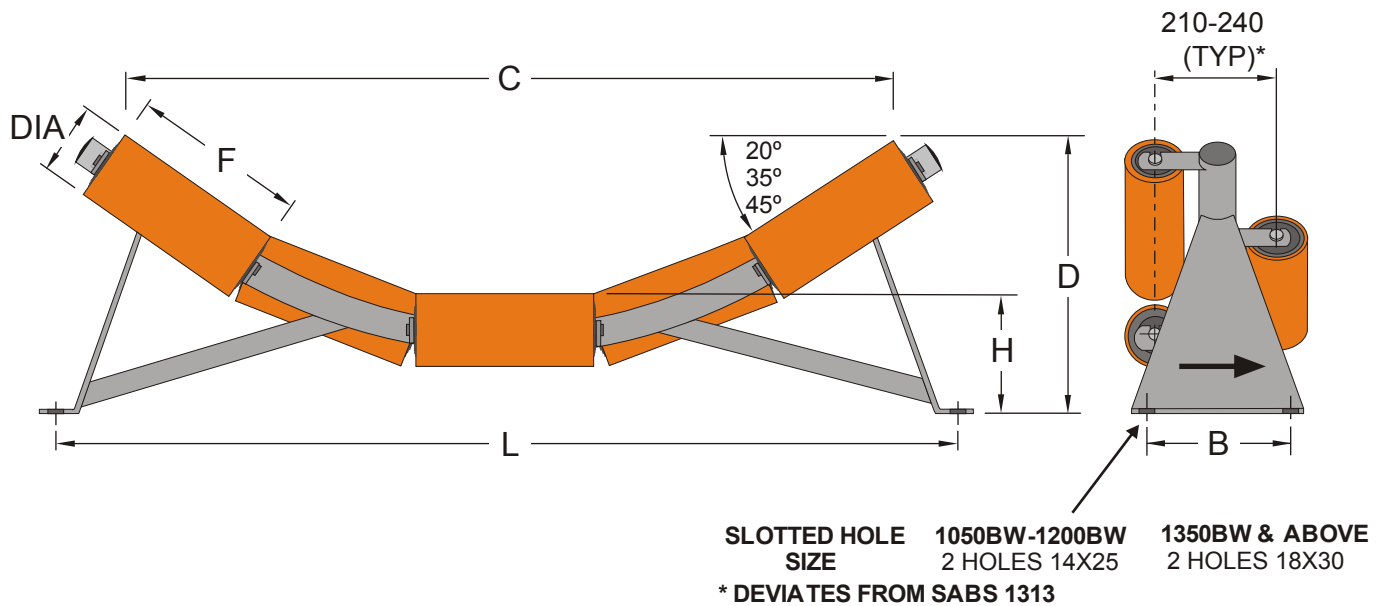


SABS SERIES 25														127 DIAMETER				BEARING 6205-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)									
				C	D	C	D	C	D			R.M	TOTAL								
SABS25B5F- 1050 -127- 62-00	1050	240	1296	1124	322	1051	408	983	459	203	100	19.8	46								
SABS25B5F- 1200 -127- 62-00	1200	270	1448	1269	337	1187	434	1111	492	203	100	22.1	50								
SABS25B5F- 1350 -127- 62-00	1350	300	1600	1415	353	1324	460	1239	525	203	240	23.3	53								
SABS25B5F- 1500 -127- 62-00	1500	340	1752	1609	373	1506	495	1409	568	203	240	25.6	58								
SABS25B5F- 1650 -127- 62-00	1650	370	1904	1754	389	1642	521	1537	601	203	240	27.3	64								
SABS25B5F- 1800 -127- 62-00	1800	400	2058	1900	404	1778	548	1665	634	203	240	29.1	70								
SABS25B5F- 2000 -127- 62-00	2000	450	2260	2142	430	2006	591	1878	688	203	310	31.9	77								
SABS25B5F- 2100 -127- 62-00	2100	475	2362	2263	443	2119	613	1985	715	203	310	33.4	81								
SABS25B5F- 2200 -127- 62-00	2200	490	2464	2336	451	2188	626	2049	732	203	310	34.2	85								
SABS25B5F- 2400 -127- 62-00	2400	536	2668	2559	474	2397	666	2245	782	203	310	36.9	105								

SABS SERIES 25				152 DIAMETER				BEARING 6205-2RS					
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS25B5F- 1050 -152- 62-00	1050	240	1296	1124	334	1051	420	983	471	215	100	25.1	51
SABS25B5F- 1200 -152- 62-00	1200	270	1448	1269	349	1187	446	1111	504	215	100	28.0	56
SABS25B5F- 1350 -152- 62-00	1350	300	1600	1415	365	1324	472	1239	537	215	240	29.5	60
SABS25B5F- 1500 -152- 62-00	1500	340	1752	1609	385	1506	507	1409	580	215	240	32.4	65
SABS25B5F- 1650 -152- 62-00	1650	370	1904	1754	401	1642	533	1537	613	215	240	34.6	72
SABS25B5F- 1800 -152- 62-00	1800	400	2058	1900	416	1778	560	1665	646	215	240	36.8	78
SABS25B5F- 2000 -152- 62-00	2000	450	2260	2142	442	2006	603	1878	700	215	310	40.5	86
SABS25B5F- 2100 -152- 62-00	2100	475	2362	2263	455	2119	625	1985	727	215	310	42.3	90
SABS25B5F- 2200 -152- 62-00	2200	490	2464	2336	463	2188	638	2049	744	215	310	43.4	95
SABS25B5F- 2400 -152- 62-00	2400	536	2668	2559	486	2397	678	2245	794	215	310	46.8	115

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

5 ROLL BELT FRIENDLY IDLER **SABS SERIES 30**

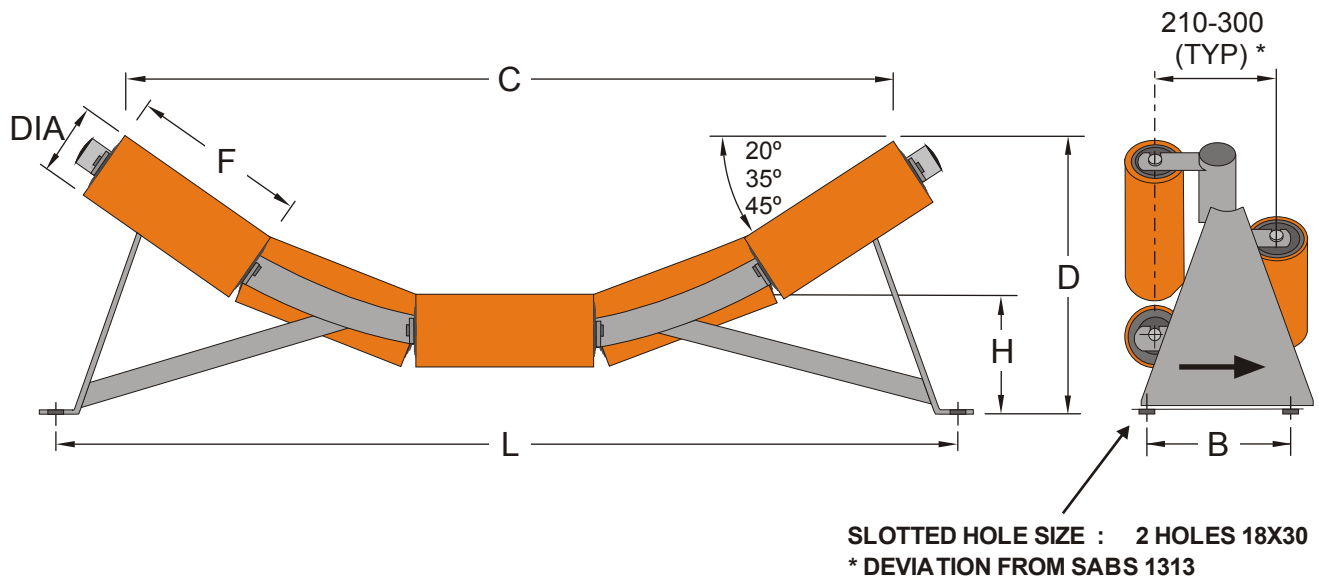


SABS SERIES 30				152 DIAMETER						BEARING 6206-2RS			
PART NUMBER	BW	F	L	20°		35°		45°		H	B	MASS (KG)	
				C	D	C	D	C	D			R.M	TOTAL
SABS30B5F- 1050 -152- 62-00	1050	240	1296	1124	384	1051	470	983	521	265	240	25.8	55
SABS30B5F- 1200 -152- 62-00	1200	270	1448	1269	399	1187	496	1111	554	265	240	28.8	60
SABS30B5F- 1350 -152- 62-00	1350	300	1600	1415	415	1324	522	1239	587	265	240	30.2	69
SABS30B5F- 1500 -152- 62-00	1500	340	1752	1609	455	1506	577	1409	650	285	240	33.2	75
SABS30B5F- 1650 -152- 62-00	1650	370	1904	1754	471	1642	603	1537	683	285	310	35.4	85
SABS30B5F- 1800 -152- 62-00	1800	400	2058	1900	486	1778	630	1665	716	285	310	37.6	95
SABS30B5F- 2000 -152- 62-00	2000	450	2260	2142	512	2006	673	1878	770	285	310	41.2	103
SABS30B5F- 2100 -152- 62-00	2100	475	2362	2263	525	2119	695	1985	797	285	310	43.0	107
SABS30B5F- 2200 -152- 62-00	2200	490	2464	2336	533	2188	708	2049	814	285	310	44.1	117
SABS30B5F- 2400 -152- 62-00	2400	536	2668	2559	556	2397	748	2245	864	285	310	47.5	138

PART NUMBER - REPLACE "00" WITH TROUGH ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

2 ROLL VEE RETURN IDLER **SABS SERIES 25**

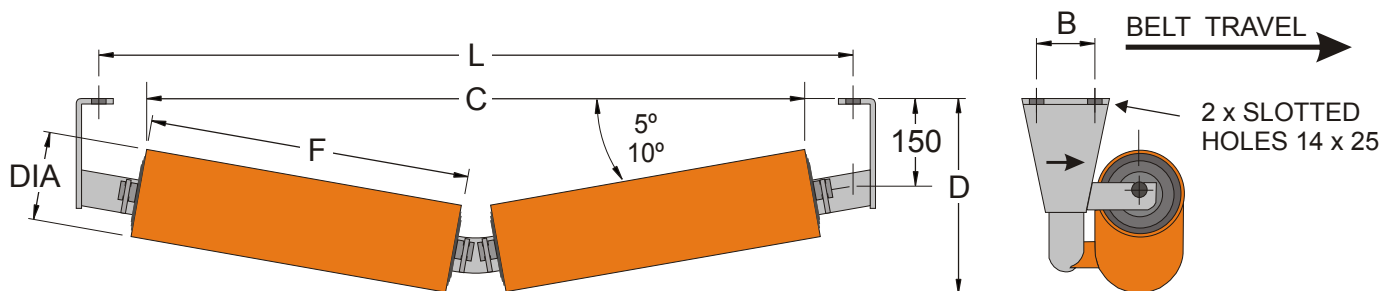


SABS SERIES 25			127 DIAMETER				BEARING 62 05-2RS			
PART NUMBER	BW	F	L	5 °		10 °		B	MASS (KG)	
				C	D	C	D		R.M	TOTAL
SABS25D- 600 -127- 62-00	600	300	838	643	239	636	265	100	9.3	19
SABS25D- 750 -127- 62-00	750	400	990	842	248	833	282	100	11.6	22
SABS25D- 900 -127- 62-00	900	475	1144	991	255	981	295	100	13.3	25
SABS25D- 1050 -127- 62-00	1050	560	1296	1161	262	1148	310	100	15.3	30
SABS25D- 1200 -127- 62-00	1200	635	1448	1310	269	1296	323	100	17	35
SABS25D- 1350 -127- 62-00	1350	720	1600	1480	276	1463	338	100	19	39
SABS25D- 1500 -127- 62-00	1500	800	1752	1639	283	1621	351	100	20.8	42
SABS25D- 1650 -127- 62-00	1650	885	1904	1808	290	1788	366	100	22.8	45
SABS25D- 1800 -127- 62-00	1800	965	2058	1968	297	1946	380	100	24.6	51

SABS SERIES 25			152 DIAMETER				BEARING 62 05-2RS			
PART NUMBER	BW	F	L	5 °		10 °		B	MASS (KG)	
				C	D	C	D		R.M	TOTAL
SABS25D- 600 -152- 62-00	600	300	838	643	252	636	277	100	11.8	21
SABS25D- 750 -152- 62-00	750	400	990	842	261	833	294	100	14.7	25
SABS25D- 900 -152- 62-00	900	475	1144	991	267	981	307	100	16.9	29
SABS25D- 1050 -152- 62-00	1050	560	1296	1161	274	1148	322	100	19.4	35
SABS25D- 1200 -152- 62-00	1200	635	1448	1310	281	1296	335	100	21.6	40
SABS25D- 1350 -152- 62-00	1350	720	1600	1480	288	1463	350	100	24.1	44
SABS25D- 1500 -152- 62-00	1500	800	1752	1639	295	1621	364	100	26.4	48
SABS25D- 1650 -152- 62-00	1650	885	1904	1808	303	1788	378	100	28.9	52
SABS25D- 1800 -152- 62-00	1800	965	2058	1968	310	1946	392	100	31.3	57

PART NUMBER - REPLACE "00" WITH ROLL ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

2 ROLL VEE RETURN IDLER **SABS SERIES 30**

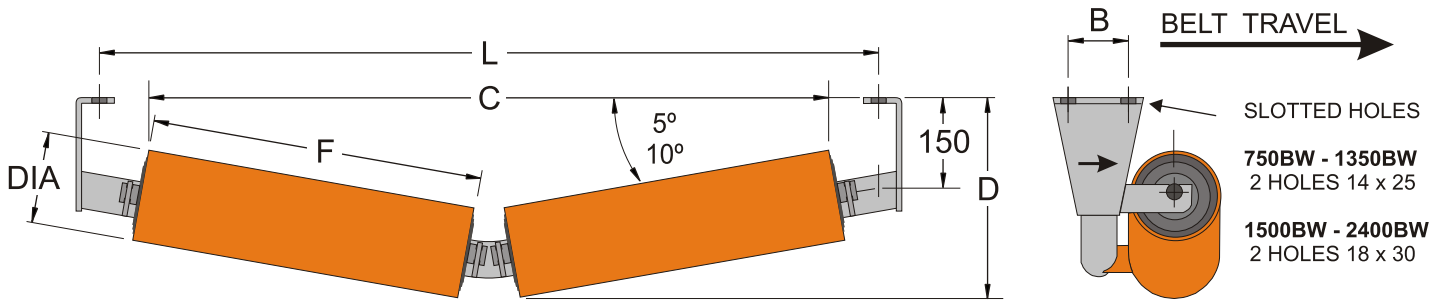


SABS SERIES 30			152 DIAMETER				BEARING 6206-2RS			
PART NUMBER	BW	F	L	5°		10°		B	MASS (KG)	
				C	D	C	D		R.M	TOTAL
SABS30D- 750 -152- 62-00	750	400	990	842	261	833	294	100	15	28
SABS30D- 900 -152- 62-00	900	475	1144	991	267	981	307	100	17.2	34
SABS30D- 1050 -152- 62-00	1050	560	1296	1161	274	1148	322	100	19.7	39
SABS30D- 1200 -152- 62-00	1200	635	1448	1310	281	1296	335	100	21.9	43
SABS30D- 1350 -152- 62-00	1350	720	1600	1480	288	1463	350	100	24.4	47
SABS30D- 1500 -152- 62-00	1500	800	1752	1639	295	1621	364	150	26.7	54
SABS30D- 1650 -152- 62-00	1650	885	1904	1808	303	1788	378	150	29.2	58
SABS30D- 1800 -152- 62-00	1800	965	2058	1968	310	1946	392	150	31.6	62
SABS30D- 2000 -152- 62-00	2000	1075	2260	2187	319	1946	411	240	34.8	69
SABS30D- 2100 -152- 62-00	2100	1146	2362	2328	326	2302	424	240	36.9	78
SABS30D- 2200 -152- 62-00	2200	1185	2464	2406	329	2379	431	240	38	80
SABS30D- 2400 -152- 62-00	2400	1298	2668	2631	339	2602	450	240	41.4	86

PART NUMBER - REPLACE "00" WITH ROLL ANGLE

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

1 ROLL FLAT RETURN IDLER **SABS SERIES 25**

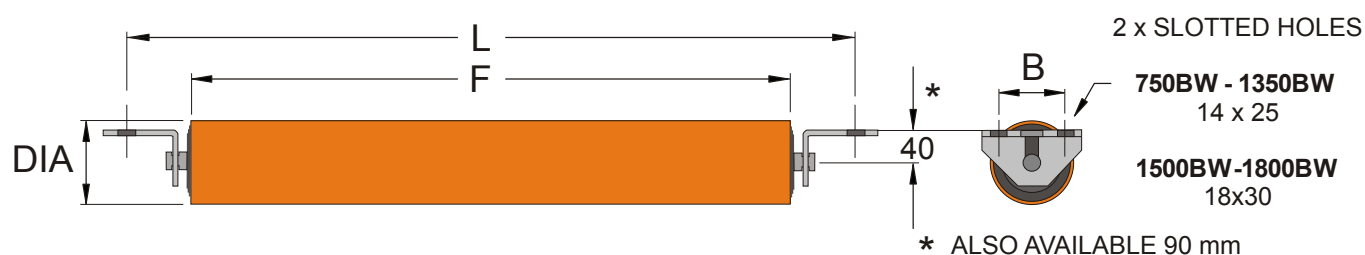


SABS SERIES 25		127 DIAMETER			BEARING 62 05-2RS	
PART NUMBER	BW	F	L	B	MASS (KG)	
					R.M	TOTAL
SABS25E- 450 -127- 62-00	450	536	686	100	6.8	10
SABS25E- 500 -127- 62-00	500	586	736	100	7.9	12
SABS25E- 600 -127- 62-00	600	688	838	100	9.1	13
SABS25E- 750 -127- 62-00	750	840	990	100	10.9	16
SABS25E- 900 -127- 62-00	900	994	1144	100	12.7	18
SABS25E- 1050 -127- 62-00	1050	1146	1296	100	14.4	20
SABS25E- 1200 -127- 62-00	1200	1298	1448	100	16.2	23
SABS25E- 1350 -127- 62-00	1350	1450	1600	100	17.9	24
SABS25E- 1500 -127- 62-00	1500	1602	1752	100	19.6	28
SABS25E- 1650 -127- 62-00	1650	1754	1904	100	21.4	30
SABS25E- 1800 -127- 62-00	1800	1908	2058	100	23.2	32

SABS SERIES 25		152 DIAMETER			BEARING 62 05-2RS	
PART NUMBER	BW	F	L	B	MASS (KG)	
					R.M	TOTAL
SABS25E- 450 -152- 62-00	450	536	686	100	8.6	12
SABS25E- 500 -152- 62-00	500	586	736	100	10.1	14
SABS25E- 600 -152- 62-00	600	688	838	100	11.6	16
SABS25E- 750 -152- 62-00	750	840	990	100	13.8	19
SABS25E- 900 -152- 62-00	900	994	1144	100	16.1	22
SABS25E- 1050 -152- 62-00	1050	1146	1296	100	18.3	24
SABS25E- 1200 -152- 62-00	1200	1298	1448	100	20.5	28
SABS25E- 1350 -152- 62-00	1350	1450	1600	100	22.7	30
SABS25E- 1500 -152- 62-00	1500	1602	1752	100	24.9	33
SABS25E- 1650 -152- 62-00	1650	1754	1904	100	27.2	35
SABS25E- 1800 -152- 62-00	1800	1908	2058	100	29.4	37

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.

1 ROLL FLAT RETURN IDLER **SABS SERIES 30**

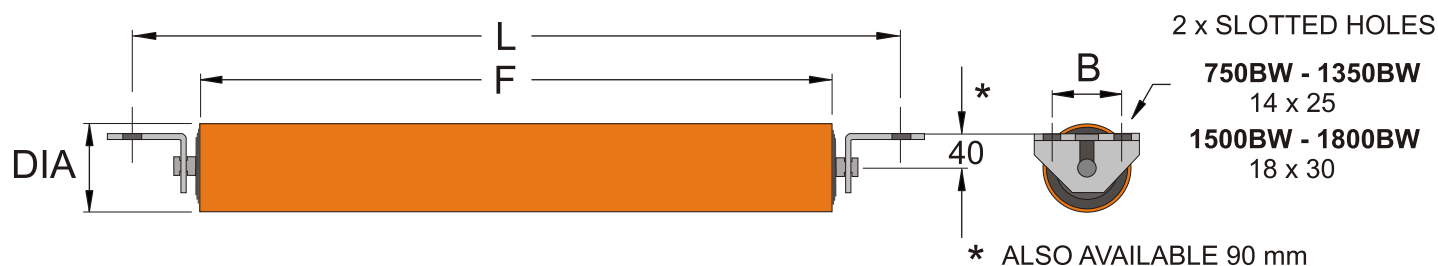

SABS SERIES 30		152 DIAMETER		BEARING 6206-2RS		
PART NUMBER	BW	F	L	B	MASS (KG)	
					R.M	TOTAL
SABS30E- 750 -152- 62-00	750	840	990	100	13.9	21
SABS30E- 900 -152- 62-00	900	994	1144	100	16.3	24
SABS30E- 1050 -152- 62-00	1050	1146	1296	100	18.5	28
SABS30E- 1200 -152- 62-00	1200	1298	1448	100	20.7	31
SABS30E- 1350 -152- 62-00	1350	1450	1600	100	23.6	37
SABS30E- 1500 -152- 62-00	1500	1602	1752	150	25.8	40
SABS30E- 1650 -152- 62-00	1650	1754	1904	150	28.7	45
SABS30E- 1800 -152- 62-00	1800	1908	2058	150	31.7	49

Sizes and masses shown are nominal and are subject to change without notice.
Certified drawings are available on request.